



REFRIGERATION AND
AIR CONDITIONING

Instructions

System Manager AK-SM 820/850/880



080R9302



RI8PU353

CE
 $-10^{\circ} < t_{amb} < 55^{\circ}C$
 $14^{\circ}F < t_{amb} < 130^{\circ}F$
 0 - 95% RH, non condensing
 IP20
 UL: E31024

100 - 240 Va.c.
 Alarm
 Modbus
 LON

Relay 2

100 - 240 Va.c. N

Modbus
 20 21 22
 ⚭ A⁺ B⁻

LON
 34 35 36
 ⚭ A⁺ B⁻

Selve installationen af datakommunikationskablet skal overholde de krav, som er nævnt i dokumentet "Datakommunikation imellem ADAP-KOOL® Køleanlægsstyringer". Litteraturnummer = RC8AC.

The actual installation of the data communication cable must comply with the requirements mentioned in the document "Data communication between ADAP-KOOL® Refrigeration controls". Literature sheet number = RC8AC.

Beim Verlegen des Datenkommunikationskabels sind die im Dokument „Datenkommunikation zwischen ADAP-KOOL® Kälteanlagenregelsysteme“ enthaltenen Anforderungen einzuhalten. Literaturnummer = RC8AC.


L'installation elle-même du câble de transmission de données doit respecter les contraintes citées dans le document «Transmission de données ADAP-KOOL® Commande d'installation frigorifiques». Référence documentaire = RC8AC.

La instalación práctica del cable de comunicación de datos debe cumplir con los requisitos mencionados en el documento "Comunicación de datos entre controles de refrigeración ADAP-KOOL®". Número de documento = RC8AC.


Terminering
Termination
Terminierung
Terminaison
Terminación




Address
Adresse
Dirección



TCP/IP

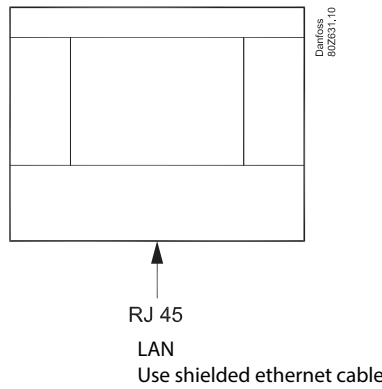

Sprog
Language
Sprache
Langage
Idioma

1. Press 
2. User name = Supervisor
Password = 12345
3. Configuration → System
4. Language :
Enab..
..
..
Display = XXXXXX

Konfiguration
Configuration
Konfiguration
Configuration
Configuración

See manual: USCO.PI.R1.H1.--

The Product contains electrical components.
And may not be disposed together with domestic waste.
Equipment must be separate collected with Electrical and Electronic waste. According to Local and currently valid legislation.



ADAP-KOOL®